


Titan Super Quad 1080p 3D

20,000 Lumens | Contrast Ratio: 2,000:1 | Part Number: 113-103

TITAN QUAD SERIES DIGITAL PROJECTORS

THE VISIONARIES CHOICE

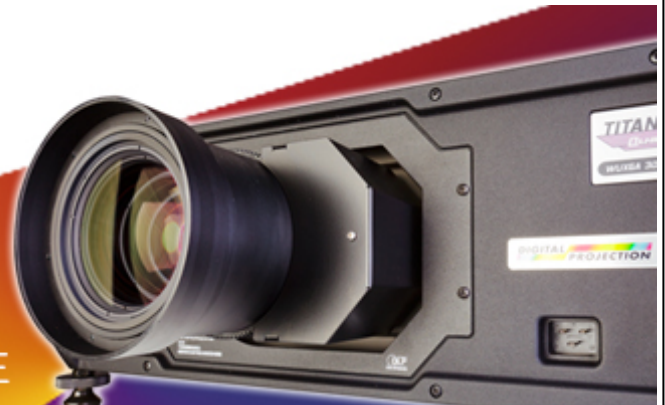

20,000 Lumens | Contrast Ratio: 2,000:1 | Part Number: 113-103

Colour System:

3-chip DLP®

DMD Specification:

1920 x 1080 pixels native, +/- 12° tilt angle
Fast transit pixels for smooth greyscale and improved contrast.

Display Type:

3 x 0.95" DarkChip™ DMD™

Aspect Ratio:

16x9

Fill Factor

87%

Key Features

Standard Inputs (1-8): Front End Video Capabilities

Video & Graphics Processing

- High bandwidth digital & analog receiver with 10 bit A-D.
- Automatic detection of interlaced video and implementation of 3:2 or 2:2 extraction as appropriate, with pixel based, motion adaptive interpolation and auto cadence correction.
- Displayed image frame locked to input with as low as 1 frame total latency.
- 24p and 1080p native display.
- Image enhancement for MPEG, Mosquito noise & color transients in composite sources.

Geometry Correction

- Cornerstone, Vertical & Horizontal Keystone, Pincushion & Barrel, and Image Rotation.
- Non-linear Warp adjustment by moving points on an interpolated grid.

Edge Blending

- Semi-automated multi projector tiling
- Correction for non-active pixels at the edge of the display.

Super Image Clarity

- Geometry correction and Edge Blending implemented in single stage process, retaining maximum image resolution.

Picture in Picture

- Two sources can be displayed either one within the other (PIP), or side by side, with original aspect ratios maintained.

ColorMax™

- Accurate matching of projectors in tiled or blended applications.
- User selection and storage of primary and secondary color targets.

High Bandwidth Inputs (9-11): Bypassing Front End for Minimal Latency

- Pixel mapped to the display.
- Dual Link DVI accepts frame rates up to 160Hz with latency as low as 1 frame.
- HDMI 1.4 for Side by Side, Frame Packing & Top Bottom formats.
- Dual Flash Processing can be used to multiply the displayed frame rate for 3D sources (example 144Hz display).
- FastFrame™ Smear Reduction.
- Dual Pipe processing: two sources in parallel for left and right eyes.
- Synchronisation of active glasses or polarising switcher.

Projector Controller Software

- Intuitive user interface for network control
- Simultaneous control of user-defined groups of projectors
- At-a-glance monitoring of projector status

Source Compatibility:

3GSDI is SMPTE 292M, SMPTE 259M-C and SMPTE 424M compliant.

HDMI and DVI include Deep Color™ processing up to 36 bit.

DVI inputs are HDMI compatible.

Digital Audio Extraction via SPDIF for HDMI sources.

Graphics standards up to 1920 x 1200 at 60Hz via DVI or VGA.

Component Video (SD and HD) via YPrPb, RGB or RGBS.

S-Video (PAL, NTSC & SECAM)

Composite Video (PAL, NTSC & SECAM)

High Bandwidth, Pixel Mapped Path:
 Dual DVI accepts graphics standards up to 1920 x 1200 at 120Hz.
 HDMI 1.4 including 3D Standards
 Dual Pipe (2 x DVI)

Inputs/Outputs

Video & Computer			Communication & Control		
Type	Connector	Qty	Type	Connector	Qty
DVI-D / DVI-A	DVI-I	1	3D Sync Out	BNC	1
HDMI 1.3	HDMI	1	3D Sync In	BNC	1
3G-SDI	BNC	1	LAN	RJ45	1
VGA / Analog RGB	15-pin D-Sub	1	RS232	9-pin D Sub	1
Component Video	4 x BNC	1	Wired Remote In	3.5mm Stereo Jack	1
S-Video	4-pin Mini DIN	1	Wired Remote Out	3.5mm Stereo Jack	1
Composite Video	RCA	1	Update Port	RJ45	1
Composite Video	BNC	1	Service Port	USB Type B	1
High Bandwidth Ports					
Main - Dual Link DVI-D	DVI-I	1			
Sub - HDMI 1.4	DVI-I	1			
Audio					
SPDIF Digital Output	RCA	1			

3D Formats Supported	HDTV Formats Supported
Frame Packing Dual Pipe Frame Sequential Side By Side (half) Top and Bottom	1080p (23.98Hz, 24Hz, 25Hz, 29.97Hz, 30Hz, 50Hz, 59.94Hz, 60Hz), 1080i (50Hz, 59.94Hz, 60Hz), 1080sf (23.98Hz, 24Hz), 720p (50Hz, 59.94Hz, 60Hz)

Computer Compatibility	Bandwidth
Up to 1920 x 1200	170 MHz on analog RGB 165 Megapixels per second on HDMI and DVI 297 Megapixels per second on Dual Link DVI

Remote Control	Automation Control
Addressable IR remote control, wireless and wired with loop-through. On-Board invertable keypad	RS232 LAN

Colour Temperature	Operation
User selectable from 3200 to 9000K	

illumination Type	Typical illumination Life
4 x 465W High Intensity Discharge	Full Power: 1000 hours (up to 4000 hours in lamp sequential mode) Eco Mode : 1500 hours (up to 6000 hours in lamp sequential mode)

Lenses

Lens	Part No.	Optimised Focus Range*	Lens Shift
0.67:1 fixed HB	105-607	1.1m - 10m	Vert: 0.176 (U) 0.176 (D) frame, Hor: 0.063 (L) 0.063 (R) frame
1.12:1 fixed HB	105-608	3m - 15m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
1.12:1 (short) fixed HB	105-609	1.2m - 2m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
1.16 - 1.49:1 zoom HB	109-236	3m - 15m	Vert: 0.509 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
1.39 - 1.87:1 zoom HB	105-610	4m - 24m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
1.87 - 2.56:1 zoom HB	105-611	4m - 24m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
2.56 - 4.16:1 zoom HB	105-612	9.1m - 45m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
4.16 - 6.96:1 zoom HB	105-613	12m - 80m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame
6.92 - 10.36:1 zoom HB	109-235	12m - 80m	Vert: 0.685 (U) 0.5 (D) frame, Hor: 0.188 (L) 0.188 (R) frame

* Lens focal ranges above are the optimised distances but are likely to focus further, please contact your RSM for more details. Lens ratio tolerances: E-Vision Series: +/-3%. HighLite Series: +/- 5%. M-Vision Series: +/- 2%. Titan Series: +/-2%, INSIGHT Series: +/-2%,

Lens Mount

Motorised and programmable shift, zoom and focus. Intelligent Lens Memory with 5 user-definable preset positions.

Mechanical Mounting

Front/Rear Table
 Front/Rear Ceiling
 Adjustable Front/Rear Feet
 Rugged, staging tolerant chassis with integrated handles.
 Optional RapidRig™ frame with integrated pitch, roll and yaw adjustments.

Orientation

Table Top or Inverted: Yes
Pointing Up: Yes - special software required.
Pointing Down: No
Roll (Portrait): No

Power Requirements

200-240VAC 50/60Hz single phase

Power Consumption

2400

Thermal Dissipation

8191

Fan Noise

48 dBA

Operating/Storage Temperature

Operating: 0 to 40C (32 to 104F)
 Storage: -10 to 50C (14 to 122F)

Operating Humidity

20 to 80% non-condensing

Weight (Chassis Only)

39 kg
 86.0 lb

Dimensions

L: 68.8 cm W: 58.5 cm H: 25.8 cm
 L: 27.1 in W: 23.1 in H: 10.2 in

Safety & EMC Regulations

CE, FCC Class A, CCC, KC

Accessories

Accessory	Part No.
Lamp & Filter Kit, 465W, 4 Lamp	113-715
Lamp & Filter Kit, 465W, 2 Lamp	113-714
Lamp, 465W	113-628
RapidRig™ Frame	111-265

**Dimensions included for reference only and are subject to change. Please download the full set of CAD files for this display for more accurate information.*

Downloads

[PDF CAD Drawings](#)

[User Guides](#)

[AUTOCAD Drawings](#)

[Important Information](#)

[STEP / IGS Drawings](#)

[Control Protocol](#)

[Rigging Frame CAD Drawings](#)
[Rigging Frame CAD Drawings](#)

[Control Protocol](#)

[Lens CAD Drawings](#)



Certificate Number 13629
 ISO 9001

Specifications subject to change without notice. ©2020 Digital Projection.
 DLP®, Digital Light Processing™ and DMD are trademarks of Texas Instruments, Inc

